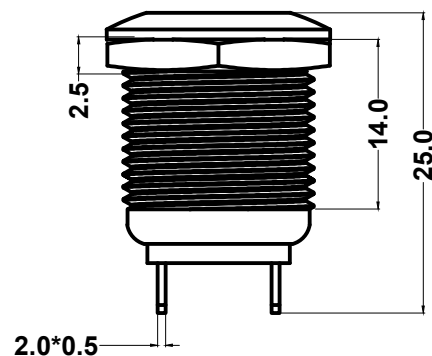
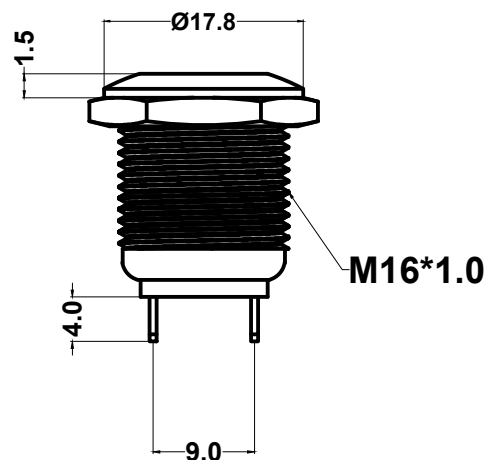


Nut Torque:5 ~ 14Nm
Operating Pressure:400gf ±100gf
Operating Stroke:1.8mm±0.2
Protection Grade:IP65,IK08
Function: Self locking function
On contact:Silver Alloy
Base:PA66
Shell \ Button:Brass,Ni Plating
Rated voltage: 3V-250V/DC AC
Rated current: 2A-4A
Contact Resistance: 50mΩ MAX.
Dielectric Strength: 2000VAC 1mA of 1 minute
Electrical life: 100000 cycles
Mechanical life: 500000 times
Operating Temperature: -15°C~75°C
Safety Approval: CE

		TOLEANCES		.X± 0.2	.XX± 0.1	MM	ANGLE ±1°	DIMENSION UNIT mm.	
		VERSION	A1	SCALE	1:1	DATE	2021	CODE	CHANGE DESCRIPTION
		DRAWN BY		CHECKED BY		APPROVED BY		M16	