


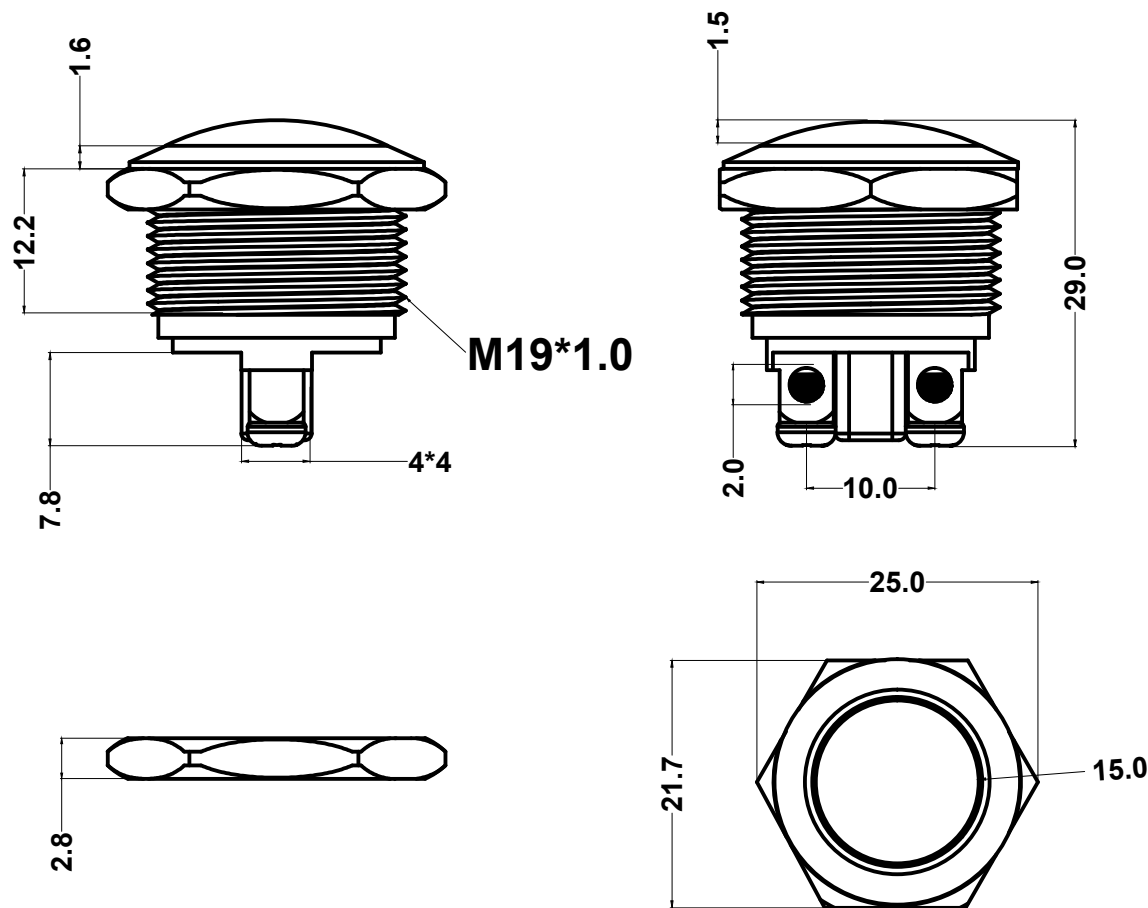

Nut Torque:5 ~ 14Nm
 Operating Pressure:400gf ±100gf
 Operating Stroke:1.8mm±0.2
 Protection Grade:IP65,IK08
 Function: (ON)-OFF reset
 On contact:Silver Alloy
 Base:PA66
 Shell \ Button:Brass,Ni Plating
 Rated voltage: 3V-250V/DC AC
 Rated current: 1A-5A
 Contact Resistance: 50mΩ MAX.
 Dielectric Strength: 2000VAC 1mA of 1 minute
 Dielectrical life: 100000 cycles
 Mechanical life: 500000 times
 Operating Temperature: -15°C~75°C
 Safety Approval:

		TOLEANCES		.X± 0.2	.XX± 0.1	ANGLE ±1°		DIMENSION UNIT mm.	
		VERSION	A1	SCALE	1:1	DATE	2021	CODE	CHANGE DESCRIPTION
		DRAWN BY		CHECKED BY		APPROVED BY		M19	