



Dimension:220x59x29mm



## ■ Features:

- Constant voltage design
- 180~264VAC input range
- Protections: Short circuit/Over load
- Cooling by free air convection
- LED indicator for power on
- 100% full load burn-in test
- 2 years warranty


## ■ Applications:

- LED strip lighting
- LED tube lighting
- LED luminous character lighting
- LED light box/cabinet

## ■ Description:

NPZ-350 is one economical slim 350W LED power supply series. The body is designed 29mm in height, which allows space saving inside the LED lighting boxes/cabinets. NPZ-350 is designed with metal housing that enhances the unit's power dissipation. With working efficiency up to 92%, the entire series can operate at the ambient temperature between -20°C and 50°C under air convection. It is equipped with constant current mode for over-load protection, fitting various LED applications. The complete protection functions and relevant certificates for LED lighting (IEC EN 61347-1, UL 8750) make NPZ-350 a very competitive power supply solution for LED lighting applications.

## ■ Model Encoding

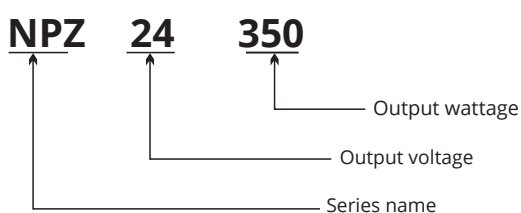

## SPECIFICATION

MODEL		NPZ-12-350	NPZ-24-350	NPZ-48-350
Output	DC voltage	12V	24V	48V
	Rated current	29A	14.6A	7.3A
	Current range	0~29A	0~14.6A	0~7.3A
	Rated power	348W	350.4W	350.4W
	Ripple&noise	200mVp-p	240mVp-p	500mVp-p
	Voltage tolerance <small>Note.3</small>	±2.0%	±2.0%	±2.0%
	Line regulation <small>Note.4</small>	±0.5%	±0.5%	±0.5%
	Load regulation <small>Note.5</small>	±1.0%	±1.0%	±1.0%
	Setup, rise, hold up time	200ms, 20ms, 24ms/230VAC		
Input	Voltage range	180~264VAC 47~63Hz, 282~339VDC		
	Efficiency	89%	91%	92%
	AC current	3.5A/230VAC		
	Inrush current	Cold start 60A/230VAC		
	leakage current	<2mA/240VAC		
Protection	Overload	Rated output power 105%~115% Start overload protection		
		Protection type: Hiccup mode, auto-recovery after fault condition is removed		
Environment	Working temp& humidity	-20°C~+50°C (Please refer to "derating curve") 20%~90%RH, Non-condensing		
	Storage temp& humidity	-40~+85°C, 10~95%RH, Non-condensing		
	Temperature coefficient	±0.03%/°C (0~50°C)		
	Withstand vibration	10~500Hz, 2G 10min./1Cycle, Period for 60min, Each axes		
Safety	Withstand voltage	I/P-O/P: 1.5KVAC I/P-FG: 1.5KVAC O/P-FG: 0.5KVAC		
	Isolation resistance	I/P-O/P, I/P-FG, O/P-FG: 100M Ohms/500VDC/25°C/70%RH		
Standards compliance	Safety standards	Compliance to UL 8750, IEC EN 61347-1		
	EMC emission	Compliance to EN 55015 (CISPR32) Class A, EN 61000-3-2		
	EMC immunity	Compliance to EN 61547		
Others	Dimension	220*59*29mm (L*W*H)		
	Weight	0.41kg/56pcs/24kg/1.07CUFT/0.03m <sup>3</sup>		


- Note:
1. All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25°C of ambient temperature.
  2. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uF & 47uF parallel capacitor.
  3. Tolerance : includes set up tolerance, line regulation and load regulation.
  4. Line regulation is measured from low line to high line at rated load.
  5. Load regulation is measured from 0% to 100% rated load
  6. The ambient temperature derating of 5°C/1000 m is needed for operating altitude greater than 2000m (6500ft)
  7. The power supply is considered as a component which will be installed into a final equipment. The final equipment must be re-confirmed that it still meets EMC directives. For guidance on how to perform these EMC tests.

# NPZ-350 Series single output slim LED power supply




## Mechanical specification


Unit:mm

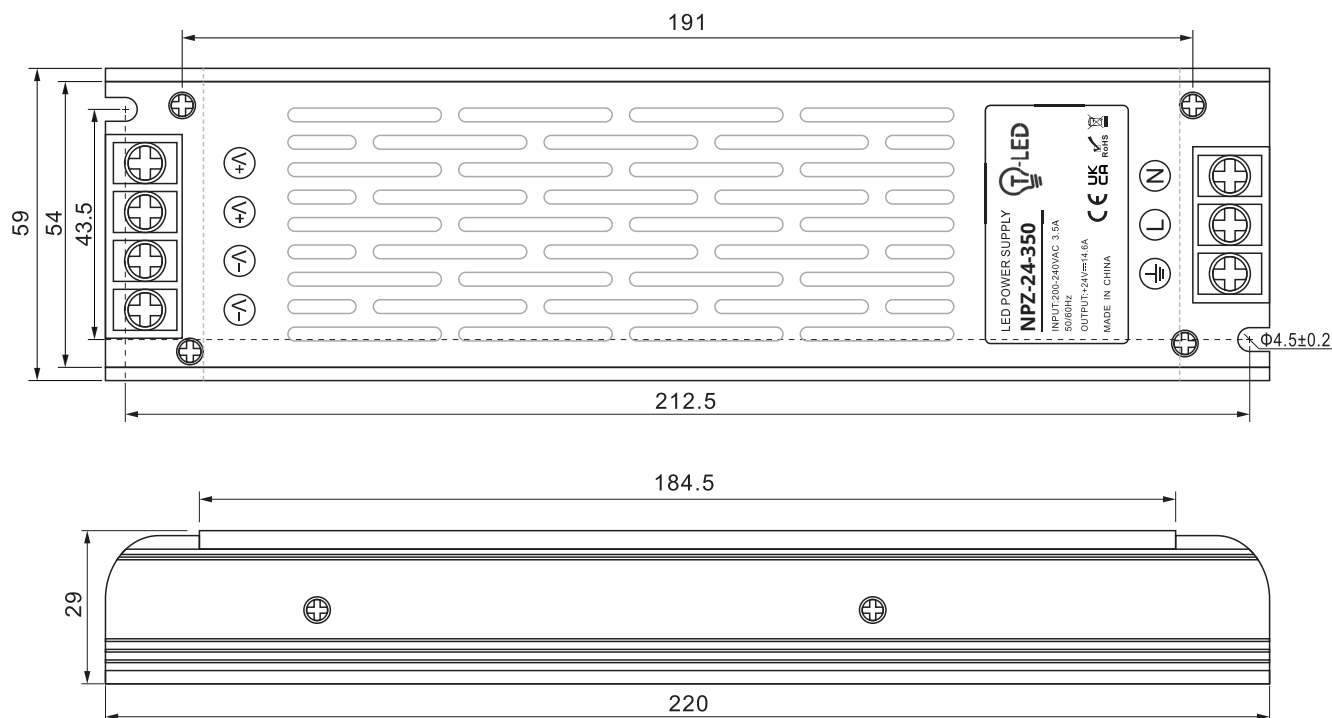

## Block diagram

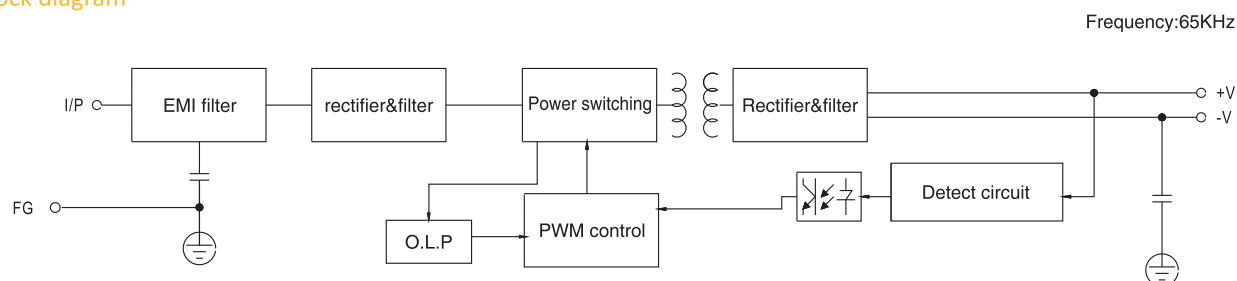

## Derating curve

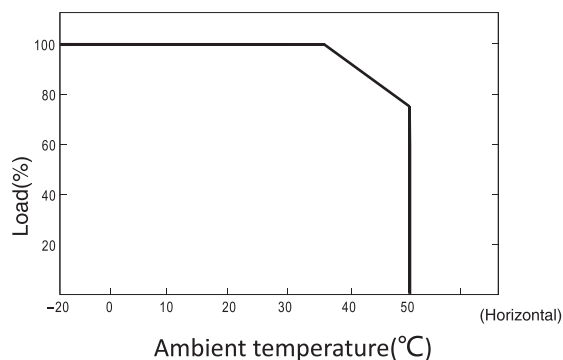

## Static characteristic

