



Features:

- Universal AC input/ full range
- Small volume, low weight, high efficiency
- Protections : short circuit/over load/over voltage
- Cooling by free air convection
- Can be installed on DIN rail : TS-35/7.5 or TS-35/15
- 100% full load burn-in test
- 2 Years warranty

SPECIFICATION

Dimension: 78 × 93 × 56mm



Model		TLDR-12-54	TLDR-24-60
Output	DC voltage	12V	24V
	Voltage tolerance	± 1%	± 1%
	Rated current	4.5A	2.5A
	Current range	0 ~ 4.5A	0 ~ 2.5A
	Rated power	54W	60W
	Ripple&noise	100mVp-p	150mVp-p
	DC voltage ADJ. range	± 10%	± 10%
	Setup, rise, hold up time	800ms,60ms,22ms/230VAC.	
Input	Voltage range	90 ~ 264VAC 47 ~ 63Hz, 127 ~ 373VDC	
	AC current	1.2A/110VAC 0.65A/220VAC	
	Efficiency	82%	84%
	Inrush current	Cold start 15A/110VAC 30A/220VAC	
	leakage current	< 1mA/240VAC	
Protection	Overload	Rated output power105%~150%Start overload protection	
		Protection type : hiccup mode, auto-recovery after fault condition is removed	
	Over voltage	15.8 ~ 17.8V	30.8 ~ 33.8V
	Protection type : Shut off o/p voltage, clamping by zener diode		
Environment	Working temp, humidity	-20°C ~ +50°C;20% ~ 90%RH(Please refer to “derating curve”)	
	Storage temp, humidity	-40°C ~ +85°C;10% ~ 95%RH Non-condensing	
Safety	Withstand vibration	10 ~ 500Hz, 5G 10min./1Cycle, Period for 60min, Each axes	
	Withstand voltage	I/P-O/P: 1.5KVAC	
	Isolation resistance	I/P-O/P: 100M Ohms/500VDC	
Fit standard	Safety standard	Compliance to UL 62368-1,TUV 62368-1,EN 62368-1	
	EMC Standard	Compliance to EN 55032, CLASSA	
Others	Dimension	78*93*56mm (W*H*D)	
	Packing	0.3kg/30pcs/9.8kg	


- Note: 1. All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25°C of ambient temperature.
 2. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf & 47uf parallel capacitor.
 3. Tolerance : includes set up tolerance, line regulation and load regulation.

Mechanical specification


Unit:mm

Terminal Pin No.Assignment


Pin NO.	Assignment	Pin NO.	Assignment
1	AC/L	5,6	+V
2	AC/N	7	LED
3,4	-V	8	+V ADJ.

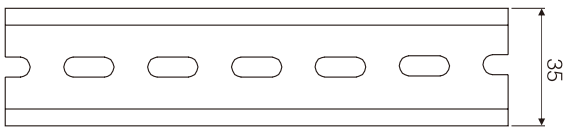


Install DIN rail:TS35/7.5 or TS35/15

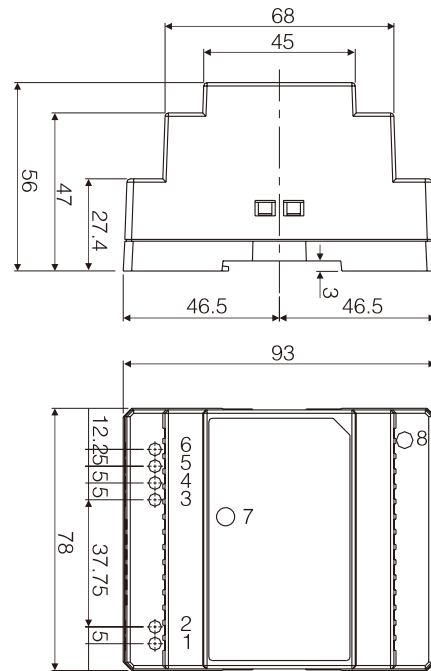

Block diagram

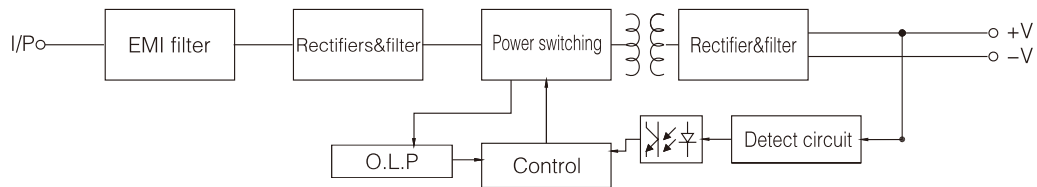

Derating curve

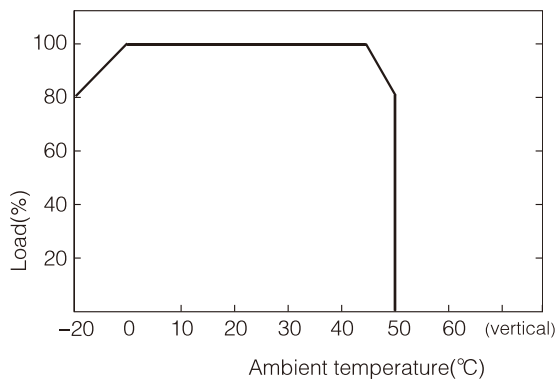

Static characteristic(24V)

